


# B SUBLIMATION PRINTING SOLUTIONS

**OR18-G5-TX2**  
**OR18-G5-TX3**  
**OR18-G5-TX4**  
 Sublimation Printer



## SPECIFICATIONS

Model	OR18-G5-TX2	OR18-G5-TX3	OR18-G5-TX4
Print Head	Two GEN5 Heads	Three GEN5 Heads	Four GEN5 Heads
Printing Technology	Piezoelectric Inkjet		
Acceptable Media	Width	71.6 in.(1820 mm)	
	Thickness	Maximum 39 mil(1 mm)	
	Weight	176 lb.(80 kg)	
Printing Width	70.8 in.(1800 mm)		
Ink Cartridges	Type	Dye Sublimation Ink	
	Capacity	4*4 CISS (220ml ink cartridge with 1.5L ink tank), 6*6 CISS (6 color), 8*8 CISS (8 color) optional	
	Color	4 colors (Cyan, Magenta, Yellow, Black) 6 colors optional	
Printing Resolution	Maximum 1200 dpi		
Printing Speed	3pass(720x450dpi): 50 sqm/h	3pass(720x450dpi): 50 sqm/h	3pass(720x450dpi): 100 sqm/h
	4pass(720x600dpi): 38 sqm/h	4pass(720x600dpi): 38 sqm/h	4pass(720x1600dpi): 75 sqm/h
Media Heating System	Intergrated post heater & Infrared Dryer & Fan system		
Interface	USB 2.0		
Power Supply	AC 220V ± 10%, 50/60 HZ		
Dimensions(with stand)	126(W)x41(D)x56(H) in.		
	( 3210(W)x1048(D)x1420(H) mm )		
Weight(with stand)	1543 lb. (700 kg)		
Package Dimensions	132(W)x47(D)x62(H) in.		
	( 3360(W)x1200(D)x1590(H) mm )		
Package Weight	1764 lb. (800 kg)		
Environment	Power on	Temperature: 59 ℉ to 90 ℉ [15℃ to 32℃] (68 ℉ [20℃] / Humidity: 35 to 80% (no condensation)	
	Power off	Temperature: 41 ℉ to 104 ℉ [5℃ to 40℃] / Humidity: 20 to 80% (no condensation)	
Accessories	USB cable, media clamp, manual, drain bottle, ink cartridges, RIP software, etc.		

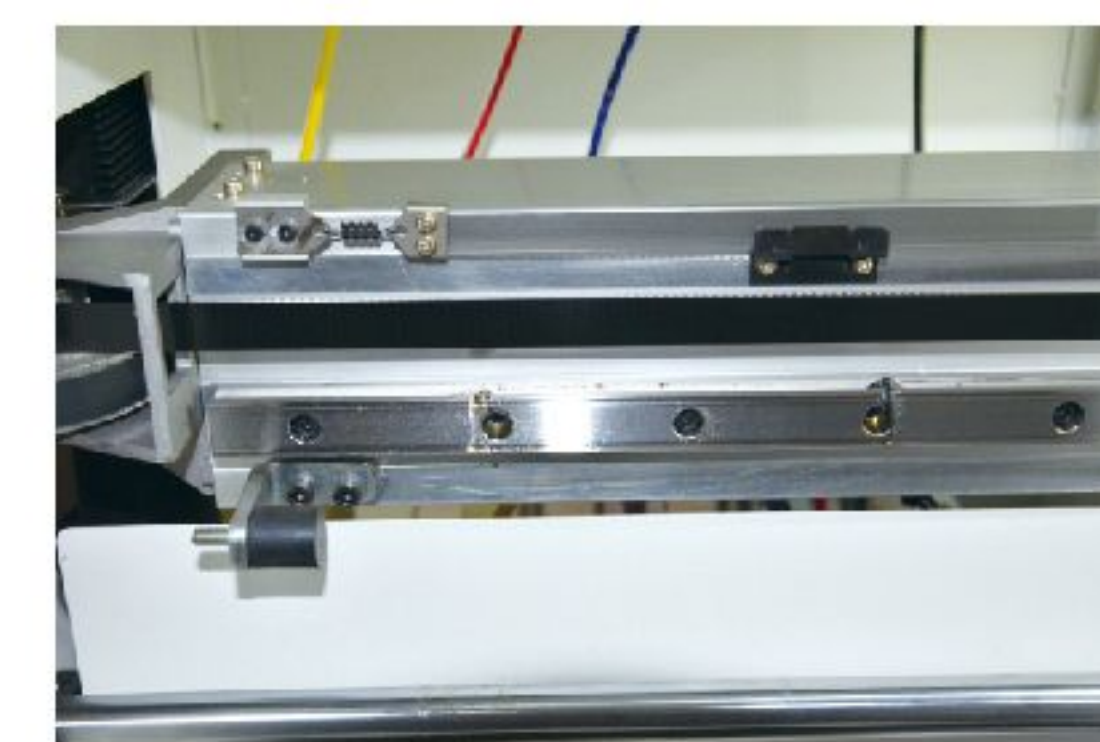

High Stability, High Durability



User Friendly Mechanical Design



Perfect Media Feed & Roll System



Stable Bulk System Ensures Amazing Printing Speed



Various Color Configuration for Perfect Output