

B SUBLIMATION PRINTING SOLUTIONS

OR18-5113-TX4 OR18-5113-TX3


Sublimation Printer




Integrated IR & cooling fan system



Junbo media roll maximum 1000m media load

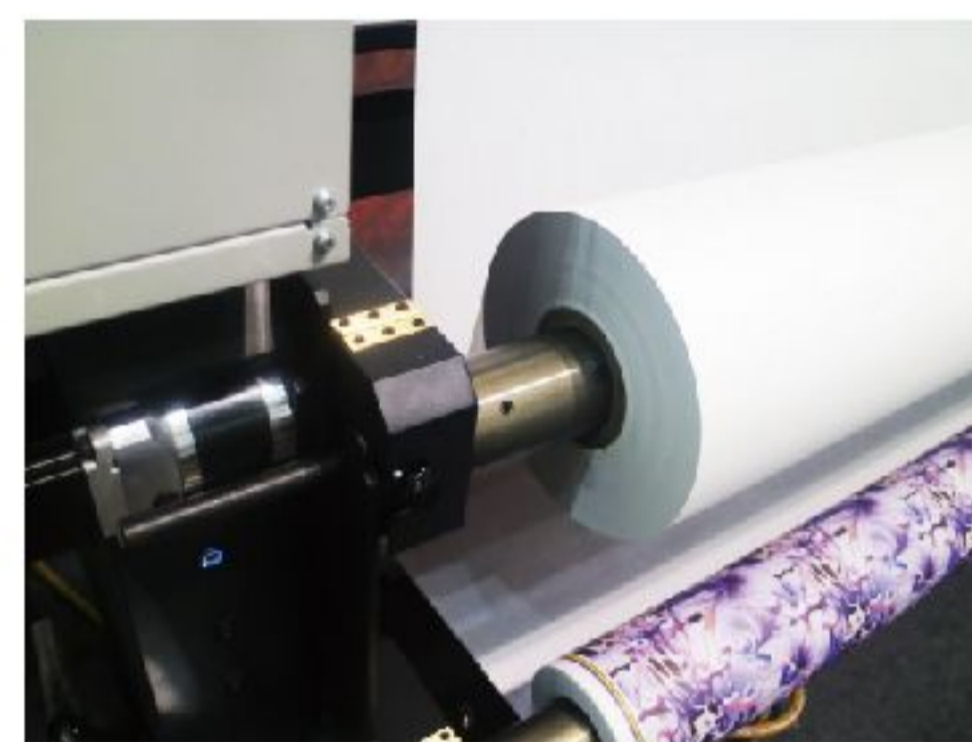

Heavy-duty motor

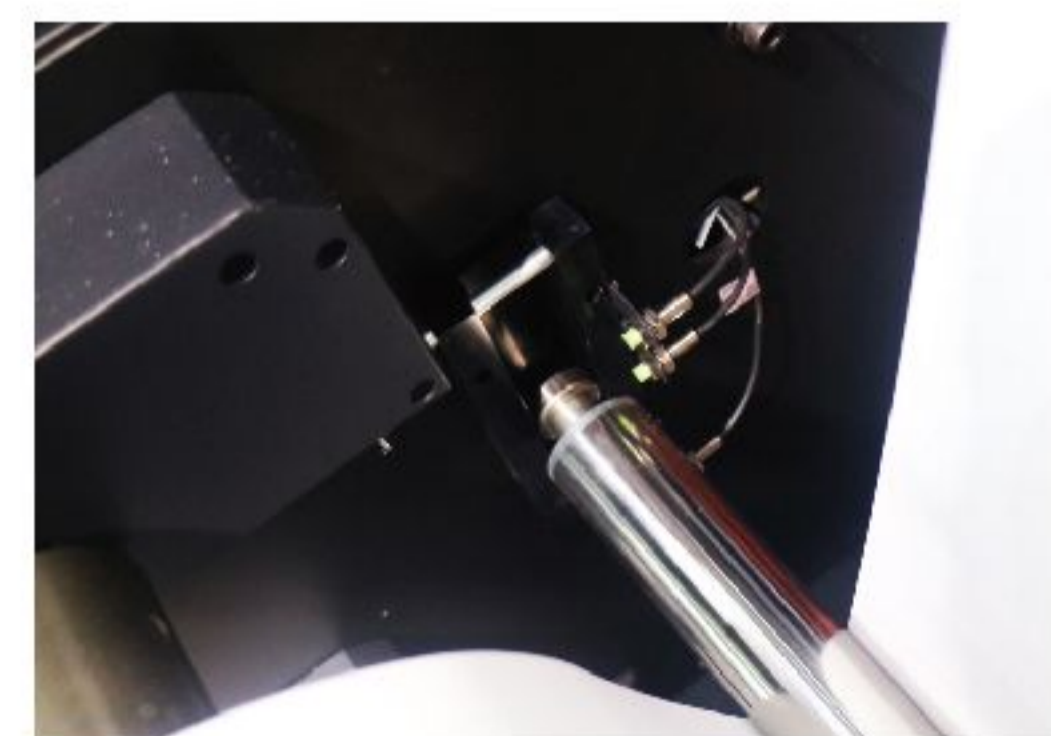

Media retraction tension bar



Inflatable take up and feed media shaft

SPECIFICATIONS

Model	OR18-5113-TX4	OR18-5113-TX3
Print Head	Four 5113 Print Heads	Three 5113 Print Heads
Printing Technology	Piezoelectric Inkjet	
Acceptable Media	Width	71.6 in.(1820 mm)
	Thickness	Maximum 39 mil(1 mm)
	Weight	220 lb.(100 kg)
Printing Width	70.8 in.(1800 mm)	
Ink Cartridges	Type	Dye Sublimation Ink
	Capacity	4*4 CISS (220ml ink cartridge with 1.5L ink tank)
	Color	4 colors (Cyan, Magenta, Yellow, Black)
Printing Resolution	Maximum 1800 dpi	
Printing Speed	3pass(720x900dpi):	1184 sqft/h (110 sqm/h)
	4pass(720x120dpi):	861 sqft/h (80 sqm/h)
	6pass(720x1800dpi):	753 sqft/h (70 sqm/h)
Media Heating System	Intergrated post heater & Infrared Dryer & Fan system	
Interface	USB 3.0	
Power Supply	AC 220V ± 10%, 50/60 HZ	
Dimensions(with stand)	130(W)x47(D)x69(H) in. (3300(W)x1200(D)x1750(H) mm)	
Weight(with stand)	1102.3 lb. (500 kg)	
Package Dimensions	132(W)x47(D)x72(H) in. (3350(W)x1200(D)x1820(H) mm)	
Package Weight	1344.8 lb. (610 kg)	
Environment	Power on	Temperature: 59 ℉ to 90 ℉ [15℃ to 32℃] / Humidity: 35 to 80% (no condensation)
	Power off	Temperature: 41 ℉ to 104 ℉ [5℃ to 40℃] / Humidity: 20 to 80% (no condensation)
Accessories	USB cable, media clamp, manual, drain bottle, ink cartridges, RIP software, etc.	