

B

SUBLIMATION PRINTING SOLUTIONS

OR18-DX5-TX2
OR18-5113-TX2
OR18-4720-TX2

Sublimation Printer



SPECIFICATIONS


Model	OR18-DX5-TX2	OR18-5113-TX2 / OR18-4720-TX2
Print Head	Dual DX5 Print Heads	Dual 5113 Print Heads / Dual 4720 Print Heads
Printing Technology	Piezoelectric Inkjet	
Acceptable Media	Width	71.6 in.(1820 mm)
	Thickness	Maximum 39 mil(1 mm)
	Weight	132.2 lb.(60 kg)
Printing Width	70.8 in.(1800 mm)	
Ink Cartridges	Type	Dye Sublimation Ink
	Capacity	4*4 CISS (220ml ink cartridge with 1.5L ink tank) 6*6 CISS (6 color), 8*8 CISS (8 color) optional
	Color	4 colors (Cyan, Magenta, Yellow, Black) 6 colors, 8 colors optional
Printing Resolution	Maximum 1440 dpi	Maximum 1800 dpi
	4pass(720x720dpi): 333 sqft (31 sqm/h)	3pass(360x1800dpi): 558 sqft (52 sqm/h)
Printing Speed	6pass(720x1080dpi): 225 sqft (21 sqm/h)	4pass(720x1200dpi): 429sqft (40 sqm/h)
	8pass(720x1440dpi): 182 sqft (17 sqm/h)	6pass(720x1800dpi): 290 sqft (27 sqm/h)
	Media Heating System	
Interface	USB 2.0	USB 3.0
Power Supply	AC 220V ± 10%, 50/60 HZ	
Dimensions(with stand)	125(W)x38(D)x55(H) in.	
	(3213(W)x970(D)x1388(H) mm)	
Weight(with stand)	882 lb. (400 kg)	
Package Dimensions	Entirety Packing : 133(W)x45(D)x62(H) in. (3380(W)x1150(D)x1610(H) mm)	
	Split Packing : 132(W)x40(D)x40(H) in. (3360(W)x1020(D)x1020(H) mm)	
Package Weight	Entirety Packing : 1102.5 lb. (500 kg) Split Packing : 1058.4 lb. (480 kg)g	
Environment	Power on	Temperature: 59 ℉ to 90 ℉ [15℃ to 32℃] (68 ℉ [20℃] / Humidity: 35 to 80% (no condensation)
	Power off	Temperature: 41 ℉ to 104 ℉ [5℃ to 40℃] / Humidity: 20 to 80% (no condensation)
Accessories	USB cable, media clamp, manual, drain bottle, ink cartridges, RIP software, etc.	



Stable Bulk System Ensures Amazing Printing Speed



The New EPS3200 Print Head

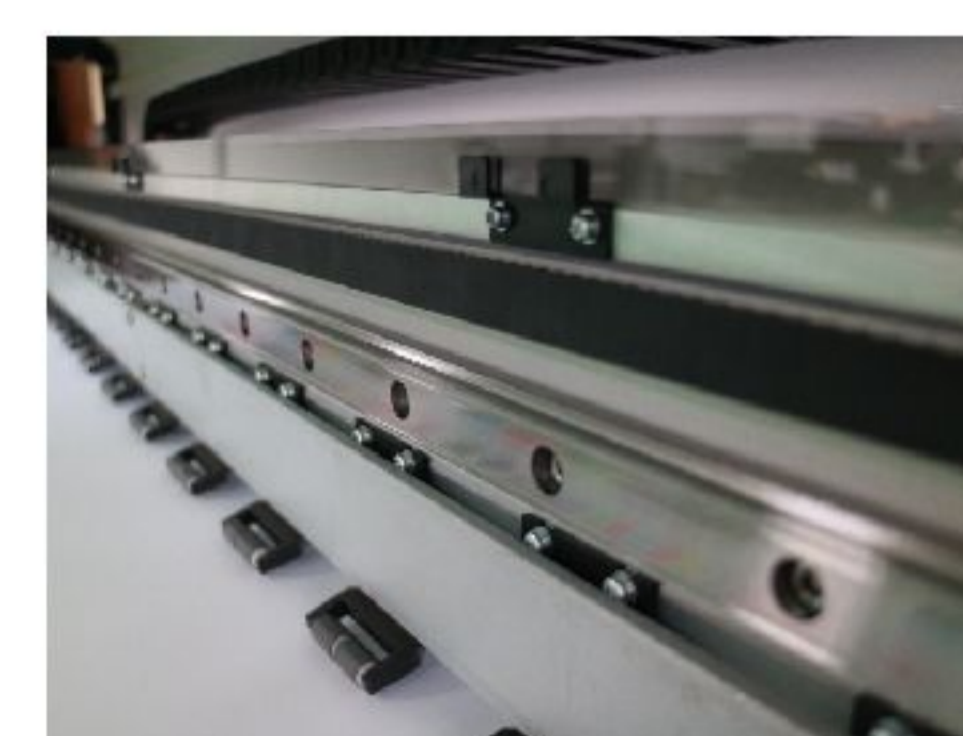

User Friendly Mechanical Design