



# A


## ECO SOLVENT PRINTING SOLUTIONS

### OR18-DX5-S3

Eco Solvent Printer

#### SPECIFICATIONS

Model	OR18-DX5-S3	
Print Head	Three DX5 Print Heads	
Printing Technology	Piezoelectric Inkjet	
Acceptable Media	Width	71.6 in.(1820 mm)
	Thickness	Maximum 59 mil(1.5 mm)
	Weight	132.2 lb.(60 kg)
Printing Width	70.8 in.(1800 mm)	
Ink Cartridges	Type	Eco Solvent Ink
	Capacity	4*4 CISS (220ml ink cartridge with 1.5L ink tank) 6*6 CISS (6 color), 8*8 CISS (8 color) optional
	Color	4 colors (Cyan, Magenta, Yellow, Black) 6 colors, 8 colors optional
Printing Resolution	Maximum 1440 dpi	
Printing Speed	4pass(720*720dpi): 460sqft (43sqm/h)	
	6pass(720*1080dpi): 322sqft (30sqm/h)	
	8pass(720*1440dpi): 246sqft (23sqm/h)	
Media Heating System	Intergrated tri-heater system	
Interface	USB 2.0	
Power Supply	AC 220V ± 10%, 50/60 HZ	
Dimensions(with stand)	125(W)x38(D)x55(H) in. ( 3213(W)x970(D)x1388(H) mm )	
Weight(with stand)	882 lb. (400 kg)	
Package Dimensions	Entirety Packing : 133(W)x45(D)x62(H) in. ( 3380(W)x1150(D)x1610(H) mm )	
	Split Packing : 132(W)x40(D)x40(H) in. ( 3360(W)x1020(D)x1020(H) mm )	
Package Weight	Entirety Packing : 1102.5 lb. (500 kg) Split Packing : 1058.4 lb. (480 kg)	
Environment	Power on	Temperature: 59 ℉ to 90 ℉ [15℃ to 32℃] (68 ℉ [20℃] / Humidity: 35 to 80% (no condensation)
	Power off	Temperature: 41 ℉ to 104 ℉ [5℃ to 40℃] / Humidity: 20 to 80% (no condensation)
Accessories	USB cable, media clamp, manual, drain bottle, ink cartridges, RIP software, etc.	

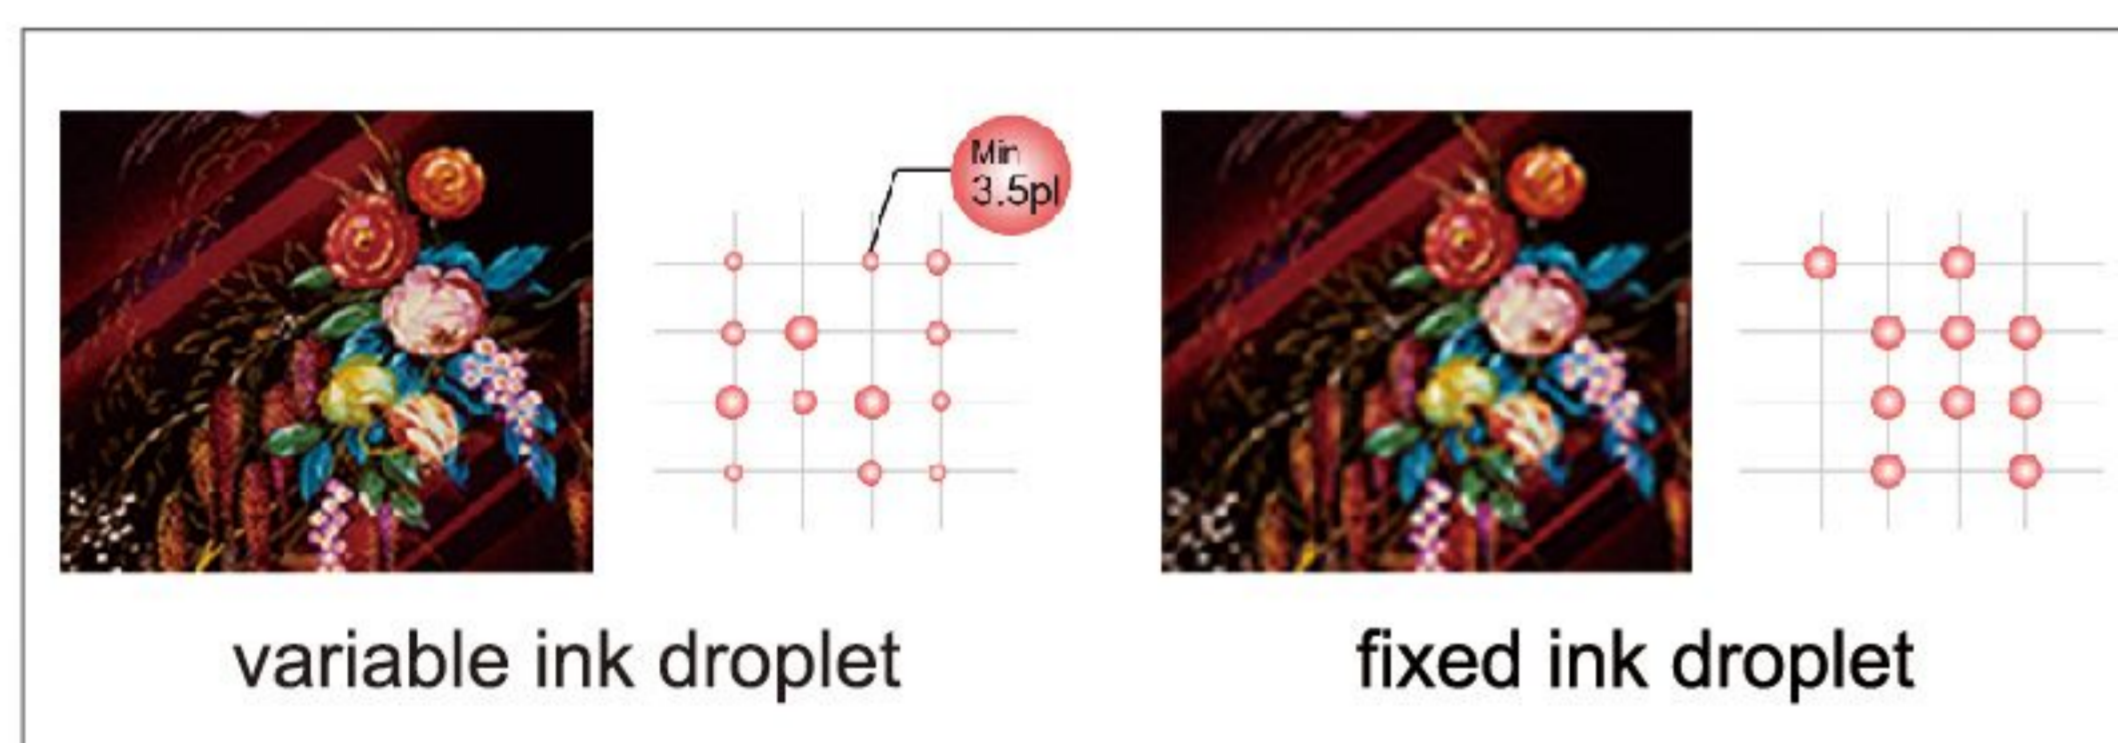

Min 3.5pl Variable Ink Droplet



Stable Bulk System Ensures Amazing Printing Speed



Tension Take Up System



User Friendly Mechanical Design

