




# B

## SUBLIMATION PRINTING SOLUTIONS

**OR18-DX5-TX3**  
**OR18-5113-TX3**  
**OR18-4720-TX3**

Sublimation Printer

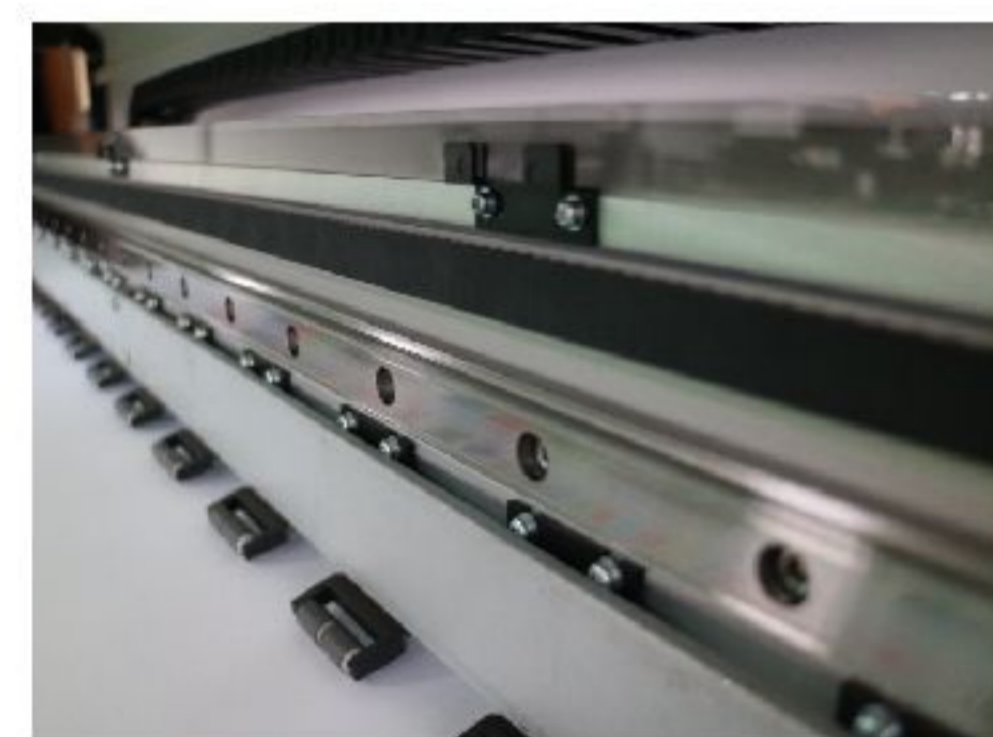

User Friendly Mechanical Design



Stable Bulk System Ensures Amazing Printing Speed



The New EPS3200 Print Head

### SPECIFICATIONS

Model	OR18-DX5-TX3	OR18-5113-TX3 / OR18-4720-TX3
Print Head	Three DX5 Print Heads	Three 5113 Print Heads / Three 4720 Print Heads
Printing Technology	Piezoelectric Inkjet	
Acceptable Media	Width	71.6 in.(1820 mm)
	Thickness	Maximum 39 mil(1 mm)
	Weight	132.2 lb.(60 kg)
Printing Width	70.8 in.(1800 mm)	
Ink Cartridges	Type	Dye Sublimation Ink
	Capacity	4*4 CISS (220ml ink cartridge with 1.5L ink tank) 6*6 CISS (6 color), 8*8 CISS (8 color) optional
	Color	4 colors (Cyan, Magenta, Yellow, Black) 6 colors, 8 colors optional
Printing Resolution	Maximum 1800 dpi	
Printing Speed	4pass(720x720dpi):	461 sqft (43 sqm/h)
	6pass(720x1080dpi):	322 sqft (30 sqm/h)
	8pass(720x1440dpi):	247 sqft (23 sqm/h)
Media Heating System	3pass(360x1800dpi):	858 sqft (80 sqm/h)
	4pass(720x1200dpi):	612 sqft (57 sqm/h)
	6pass(720x1800dpi):	408 sqft (38 sqm/h)
Media Heating System	Intergrated post heater & Infrared Dryer & Fan system	
Interface	USB 2.0	USB 3.0
Power Supply	AC 220V ± 10%, 50/60 HZ	
Dimensions(with stand)	125.3(W)x38.1(D)x54.5(H) in. ( 3213(W)x970(D)x1388(H) mm )	
Weight(with stand)	882 lb. (400 kg)	
Package Dimensions	Entirety Packing : 132.8(W)x45.2(D)x62.3(H) in. ( 3380(W)x1150(D)x1610(H) mm )	
	Split Packing : 132.1(W)x40.1(D)x40.1(H) in. ( 3360(W)x1020(D)x1020(H) mm )	
Package Weight	Entirety Packing : 1102.5 lb. (500 kg) Split Packing : 1058.4 lb. (480 kg)	
Environment	Power on	Temperature: 59 ℉ to 90 ℉ [15℃ to 32℃] (68 ℉ [20℃] / Humidity: 35 to 80% (no condensation)
	Power off	Temperature: 41 ℉ to 104 ℉ [5℃ to 40℃] / Humidity: 20 to 80% (no condensation)
Accessories	USB cable, media clamp, manual, drain bottle, ink cartridges, RIP software, etc.	